





<<< 泵性能参数 >>>

型号	Q=120		Q=120		H=2900	P	N	I	W	L	V
	Q	H	Q	H							
100GDL100-20×7	70	19.4	120	27.7	2900	47.2	75	100	2291	887	885
100GDL100-20×8	70	19.4	120	27.7	2900	53.3	75	100	2291	887	885



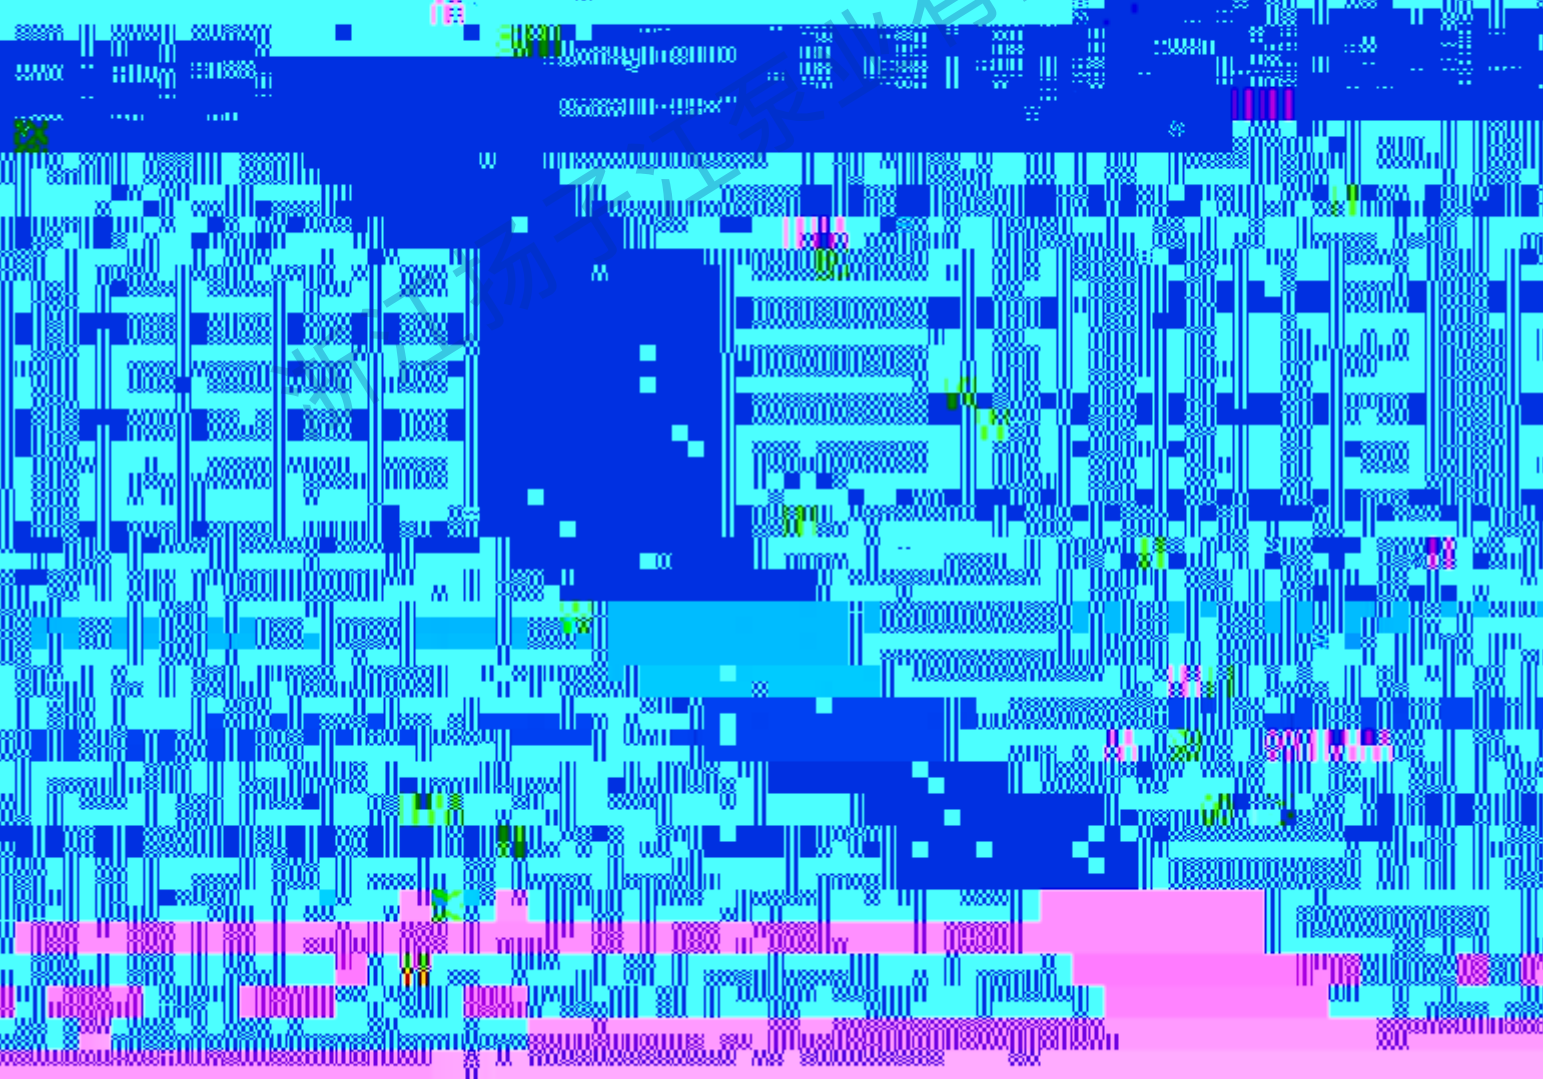

4.4 泵外形图及其尺寸

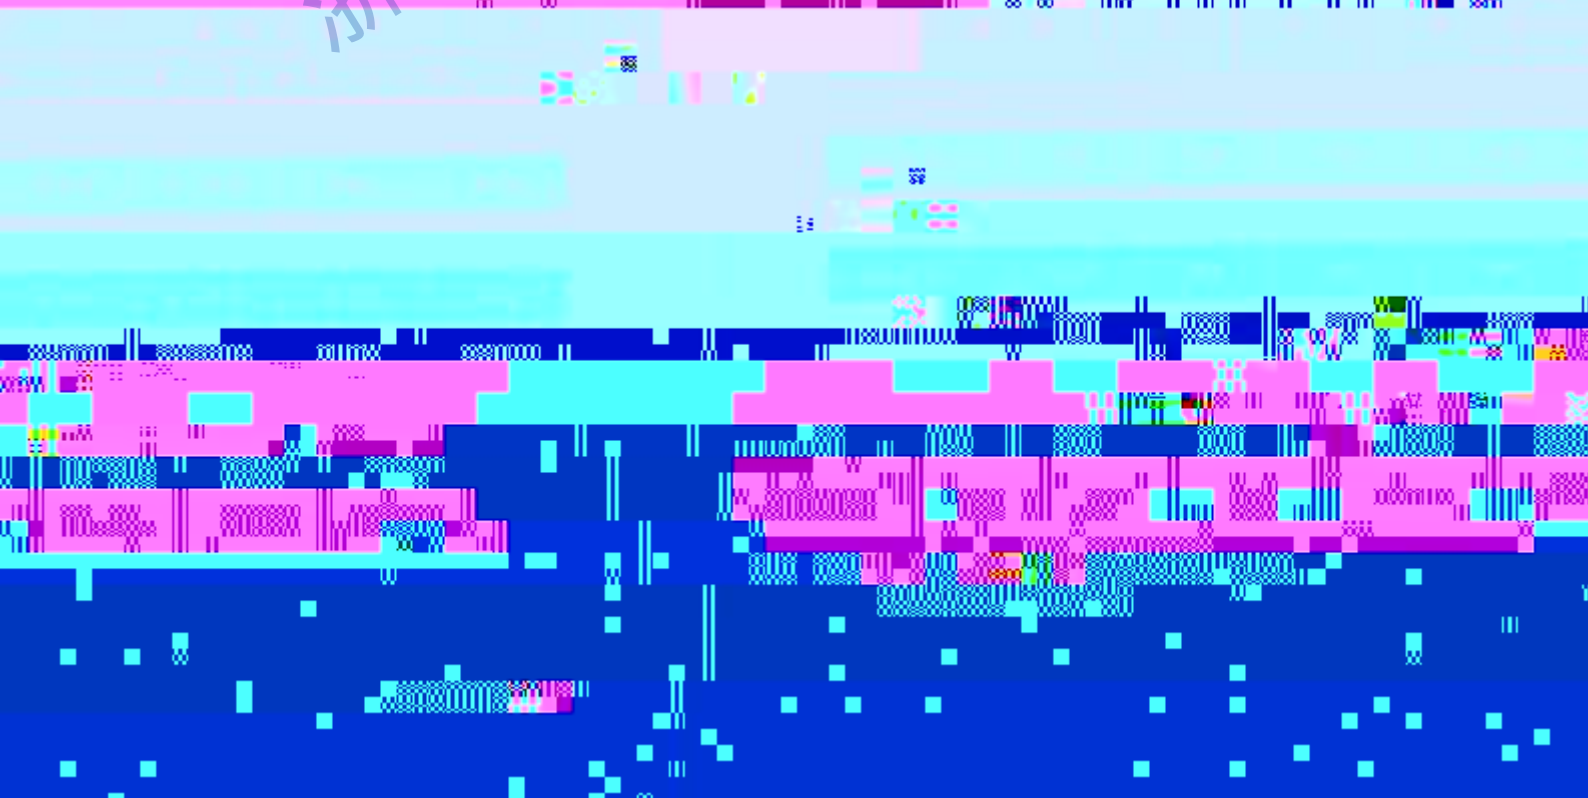



### 石粉机械密封



密封到，不能偏小，偏大。

- 1. 密封到，不能偏小，偏大。
- 2. 密封到，不能偏小，偏大。
- 3. 密封到，不能偏小，偏大。
- 4. 密封到，不能偏小，偏大。
- 5. 密封到，不能偏小，偏大。

5. 泵在运行中应有专人看管，以免发生意外。

### 机械密封的维护

1. 机械密封润滑液应清洁无固体颗粒；
2. 严禁机械密封干磨。

### 机械密封的拆除方法

www.hongyapump.com



